


UltraLITE



Interior Windshield Warning Bar

• **Upgrade to UltraLITE™ Windshield Bars & discover the hidden power of LED3 Mini Lights** - super bright 3-LED modules line these versatile warning bars for maximum output & impact (see page 21 for Interior bars without shrouds & page 22 Exterior bars for outside use)

- **4 Module bar available with Custom Color Configurations**, you choose the color of each module, see website for order form
- **2 Mounts available:** Suction Cup Mount (2 or 4 Module Lengths) with 10.5' cord & Cigar Plug or Permanent Headliner Mount (8 or 12 Module Lengths) with 14' cable for hard wire installation
- **Offered in 10 Solid or Split Colors LED color combinations** for any market - great warning bars for volunteer vehicles, fire trucks, rescue vehicles & work trucks
- **Single Warning Tips available on the 8 Module bar**
- **12 Module bar available with optional Single or Dual Warning Tips** in your choice of color
- **Compatible with the DAS Switch**, see page 61

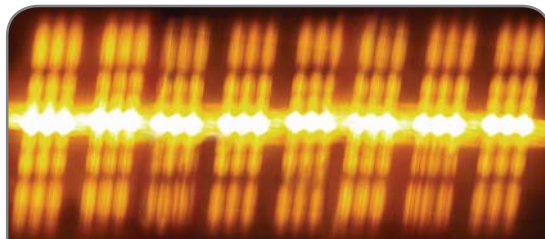

Powerful output! UltraLITE™ 8 Module bar in Amber LEDs shown illuminated.



Side of Suction Cup Mount light shown. Red Switch is the On/Off button. 8 & 12 Module lengths are hard wired.



Universal shroud mounts flush against windshield to reduce flashback. 4 Module Shroud, #PUL3WSS shown.

Tech Specs	UltraLITE™
Flash Patterns:	2 Module: 33 Flash Patterns 4 Module: 21 Flash Patterns 8 or 12 Module: Solid Color - 20 Arrow & 12 Warning Split Color - 19 Warning
Light Sync:	No
Technology:	Gen3 LEDs 2 Module: 6 / 4 Module: 12 / 8 Module: 24 12 Module: 36
Mounting:	Suction Cup or Permanent Headliner Mount
Input Voltage:	10 - 16 Vdc
Current Draw:	< 1 amp for every 2 modules (2 Mod. < 1, 4 Mod. < 2 amps, etc.) Flash Pattern Dependent
Dimensions:	Length x Height x Depth 2 Module: 7" (18 cm) L 4 Module: 13.25" (34 cm) L 8 Module: 26" (66 cm) L 12 Module: 38.75" (98 cm) L x 1.5" (38 mm) H x 3.6" (91 mm) D
Operating Temp.:	-40° to +60° C / -104° to +140° F

Parts & Accessories

- Universal L-Bracket, 1 hole: #PUL3DGM01
- Universal L-Bracket, 2 hole: #PUL3DGM02
- Universal L-Bracket, 3 hole: #PUL3DGM03
- Universal L-Bracket, 7 hole: #PUL3DGM
- Truck Bracket, Durango: #PUL3M05
- Truck Bracket, Tahoe: #PUL3M02
- End Cap: #PUL3EC
- Shroud, 2 Module: #PUL3WS2
- Shroud, 4 Module: #PUL3WSS
- Spacer: #PUL3ES
- Suction Cup Mount: #PUL3WSM



UltraLITE



Interior Windshield Warning Bar

Suction Cup Mount

2 Module: #EL3H02A0+(x)

4 Module: #EL3H04A0+(x)

Bars include Shroud, Suction Cup Mount, 12 volt Cigar Plug w/ 11.5' of cord & a pair Universal Brackets for optional permanent headliner mount.

See opposite page for Parts & Accessories.



Suction Cup Mount



2 Module Light



Cigar Plug



4 Module Light

Permanent Headliner Mount

8 Module:
#EL3Z08A00(x)

12 Module:
#EL3Z12A00(x)

Bars include Shrouds (1 shroud per 4 module length), a pair of Universal Permanent Headliner Mount Brackets with 14' of shielded cable for hard wire installation.

See opposite page for Parts & Accessories.



Permanent Mount



8 Module Light



12 Module Light

UltraLITE Interior or Exterior Directional/Warning Bars, see pages 21 - 22

Pinnacle™ Interior Lightbars, see page 16

Windshield Lights - UltraLITE™ 2, 4, 8 or 12 Module Bars

1.800.338.7337 / www.soundoffsignal.com

SoundOFF
Signal

Predator™ 2 & Predator™ LED Windshield Lights

• Features

- **Lights have a narrow, low profile** which can be mounted above or below the rear view mirror or installed in rear windows
- **Customizable shroud is pre-scored** so you can easily cut it to fit your windshield angle to reduce flashback
- **Single or Dual Light options**
- **Smooth, clear Lexan polycarbonate lens** is engineered for maximum light output with UV resistant properties to prevent fading or yellowing
- **CA Title 13 compliant models** available (see web or price guide for part numbers & pricing)
- **Two versatile mounting options:** Permanent Headliner Mount or Suction Cup Mount
- **Includes** Universal Shroud & 12v DC Plug with 11.5' cord length

Predator 2™

- Wide, bright Extreme Angle output - our brightest light
- 8 super bright Gen3 LEDs per module
- 10 - 30 Vdc

Predator™

- Lower LED count for a lower priced light
- 6 bright Gen3 LEDs per module
- 10 - 16 Vdc



Dual Light with Permanent Headliner Mount mounted above the rear view mirror in the windshield.



Dual Predator Lights mounted to the rear headliner in the back window of a Ford Explorer.

COLORS

Solid

(x) = **A B G R W**

Dual/Split

(x) = **A B D E F**
G H J K L
M N P R W

Tech Specs	Predator 2™	Predator™
Flash Patterns:	33	
Light Sync:	No	
Technology:	Single: 8 Gen3 LEDs Dual: 16 Gen3 LEDs	Single: 6 Gen3 LEDs Dual: 12 Gen3 LEDs
Mounting:	Surface Mount on 2.77" (70 mm) centers	
Input Voltage:	10 - 30 Vdc	10 - 16 Vdc
Current Draw:	Single: 1.1 amps max. Dual: 2 amps max. (flash pattern dependent)	
Dimensions:	Length x Height x Depth Single: 3.8" (10 cm) L, Dual: 7.3" (19 mm) L, x 1.9" (48 mm) H x 6.9" (18 cm) D	
Operating Temp.:	-20° to +65° C / -68° to +149° F	


Parts & Accessories

Suction Cup Mount (only): #PPRDWBRKT
 Shroud, Single: #PPRDWSSWS
 Shroud, Dual: #PPRDWSDWS



PREDATOR II

EXPLOSIVE POWER. EXTREME ANGLE.

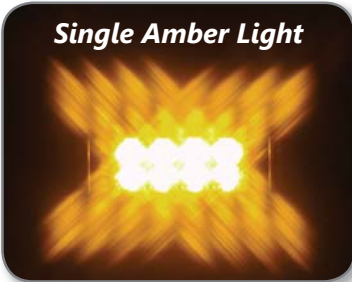

Single Amber Light



Dual Suction Cup Mount



Predator 2™

Single Light:

- #EP2SWSA+(x) Permanent Mount
- #EP2SWS+(x) Suction Cup Mount

Dual Light:

- #EP2DWSA+(x) Permanent Mount
- #EP2DWS+(x) Suction Cup Mount



Available with CA Title 13 Compliant Flash Patterns,
See Web or Price Guide for Part Numbers.

PREDATOR™

by SoundOff Signal



Single Red Light



Single Suction Cup Mount



Predator™

Single Light:

- #EPRDSWSA+(x) Permanent Mount
- #EPRDSWS+(x) Suction Cup Mount

Dual Light:

- #EPRDDWSA+(x) Permanent Mount
- #EPRDDWS+(x) Suction Cup Mount



Surface Mounts also available, see pages 29 & 31
Dash/Deck/Grille Lights also available, see pages 45 - 46



Single Light: #EPLTSWS+(x)
Dual Light: #EPLTDWS+(x)

- **Our Pilot™ Windshield lights are low cost, high power** windshield lights designed for volunteer, security & first responders
- **Powerful & bright Gen3 LEDs**
- **“Split” Single light flashes 4 diodes at a time** on each side of the light in a variety of eye-catching patterns
- **Dual light has unique “x-patterns”** which flash the upper 3 diodes of one quadrant against lower 3 diodes of the opposite quadrant, rotating through an “x-pattern” sequence
- **Adjustable height & tilt** allows for a tight fit against any windshield
- **Conveniently located rear switch** allows easy On/Off & pattern switching
- **Flash Pattern Recall remembers last flash pattern used**
- **Made with a durable aluminum housing**
- **Durable UV resistant polycarbonate lens & end caps**
- **Includes** suction cup mount, shroud & 12 volt DC plug with 11.5’ cord length



Dual light offers unique, attention grabbing “X Patterns” - upper 3 diodes flash against opposite lower 3 diodes.



Lights include Suction Cup Mount with adjustable brackets & 11.5’ cord with 12v cigar plug (single shown)



Light has convenient, quick access rear switch for Flash Pattern change & powering on or off.

Tech Specs	Pilot™
Flash Patterns:	16
Light Sync:	No
Technology:	Single: 8 Gen3 LEDs Dual: 12 Gen3 LEDs
Mounting:	Suction Cup Mount
Input Voltage:	10 - 16 Vdc
Current Draw:	Single: 0.6 amps Dual: 1 amp
Dimensions:	Length x Height x Depth Single: 4.2" (11 cm) L, Dual: 7.2" (18 cm) x 2.2" (56 mm) H x 5.2" (13 cm) D
Operating Temp.:	-40° to +65° C / -104° to +149° F

COLORS
Solid

(x) = **A B G R W**

Dual/Split

(x) = **A B D E F**
G H J K L
M N P R W

