


# UltraLITE



## Interior Windshield Warning Bar

- **Custom Color Configurations** available for the 4 Module Windshield Light (see website for order form)
- **Upgrade to UltraLITE Interior Warning Bars & discover the hidden power of LED3 Mini Lights.** Bright LED3 modules line these versatile warning bars for maximum output & impact
- **2 Mounts available:** Suction Cup Mount (2 or 4 Module Lengths) or Permanent Headliner Mount (8 or 12 Module Lengths)
- **Many vehicle specific brackets available**, see page 23 for more details & photos
- **Offered in 10 Solid or Split Colors LED color combinations** for any market - great warning bars for police, security, volunteer, fire, rescue vehicles & work trucks
- **Single Warning Tips available on the 8 Module bar**
- **Single or Dual Warning Tips available on the 12 Module bar**
- **Compatible with the DAS Switch**, see page 25

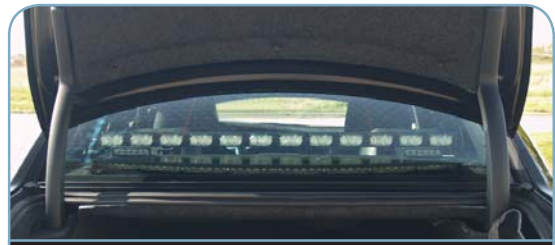

UltraLITE 12 Module Bar shown mounted in the rear window of a 2011 Dodge Charger (with no shroud).



4 Module Suction Cup Mount UltraLITE™ in Red/Blue shown illuminated on a bright day.



4 Module Suction Cup Mount UltraLITE™ shown mounted in the rear window of a Ford Mustang.



Shroud can be removed from light & used with a variety of optional brackets for a custom mount, see pg 23.

Tech Specs	UltraLITE™
Flash Patterns:	<p>2 Module: 33 Flash Patterns</p> <p>4 Module: 21 Flash Patterns</p> <p>8 or 12 Module:</p> <p>Solid Color - 20 Arrow &amp; 12 Warning</p> <p>Split Color - 19 Warning</p>
Light Sync:	No
Technology:	<p>Gen3 LEDs</p> <p>2 Module: 6 / 4 Module: 12 / 8 Module: 24</p> <p>12 Module: 36</p>
Mounting:	Suction Cup or Permanent Headliner Mount
Input Voltage:	10 - 16 Vdc
Current Draw:	<p>&lt; 1 amp for every 2 modules</p> <p>(2 Mod. &lt; 1, 4 Mod. &lt; 2 amps, etc.)</p> <p>Flash Pattern Dependent</p>
Dimensions:	<p>Length x Height x Depth</p> <p>2 Module: 7" (18 cm) L</p> <p>4 Module: 13.25" (34 cm) L</p> <p>8 Module: 26" (66 cm) L</p> <p>12 Module: 38.75" (98 cm) L</p> <p>x 1.5" (38 mm) H x 3.6" (91 mm) D</p>
Operating Temp.:	-40° to +60° C / -104° to +140° F

## Parts & Accessories

- Bracket, Univ. "L" - 1 hole #PUL3DGMØ1
- Bracket, Univ. "L", - 2 hole #PUL3DGMØ2
- Bracket, Univ. "L", - 3 hole #PUL3DGMØ3
- Bracket, Univ. "L", - 7 hold #PUL3DGM
- Bracket, Charger #PUL3MØ4
- Bracket, Crown Vic #PUL3MØ1
- Bracket, Durango #PUL3MØ5
- Bracket, Impala #PUL3MØ3
- Bracket, Tahoe #PUL3MØ2
- End Cap #PUL3EC
- Shroud, 2 Module #PUL3WS2
- Shroud, 4 Module #PUL3WSS
- Spacer #PUL3ES
- Suction Cup Mount #PUL3WSM



# UltraLITE



Interior Windshield Warning Bar



**Suction Cup Mount**

## Suction Cup Mount

**2 Module:** #EL3H02A0+(x)

**4 Module:** #EL3H04A0+(x)

Bars include Shroud, Suction Cup Mount, 12 volt Cigar Plug w/ 11.5' of cord & a pair Universal Brackets for optional permanent headliner mount.

See opposite page for Parts & Accessories.



**Cigar Plug**

**2 Module Light**



**4 Module Light**



**Brackets  
& Accessories  
see pg. 23**



**8 Module Light**

## Permanent Headliner Mount

**8 Module:**  
#EL3Z08A00(x)

**12 Module:**  
#EL3Z12A00(x)

Bars include Shrouds (1 shroud per 4 module length), a pair of Universal Permanent Headliner Mount Brackets w/ 14' of shielded cable for hard wire installation.

See opposite page for Parts & Accessories.



**Permanent Mount**



**4 Module Shroud**

*UltraLITE Interior & Exterior Directional/Warning Bars, see pages 21 - 22*

*Pinnacle™ Interior Lightbars, see pages 11 - 12*