



1051F(x) 1000 Series Beacon

A=Amber, R=Red, B=Blue

3900 Central Parkway


Hudsonville, MI 49426

toll free 800.338.7337

office 616.896.7100

techsupport@soundoffsignal.com

www.soundoffsignal.com

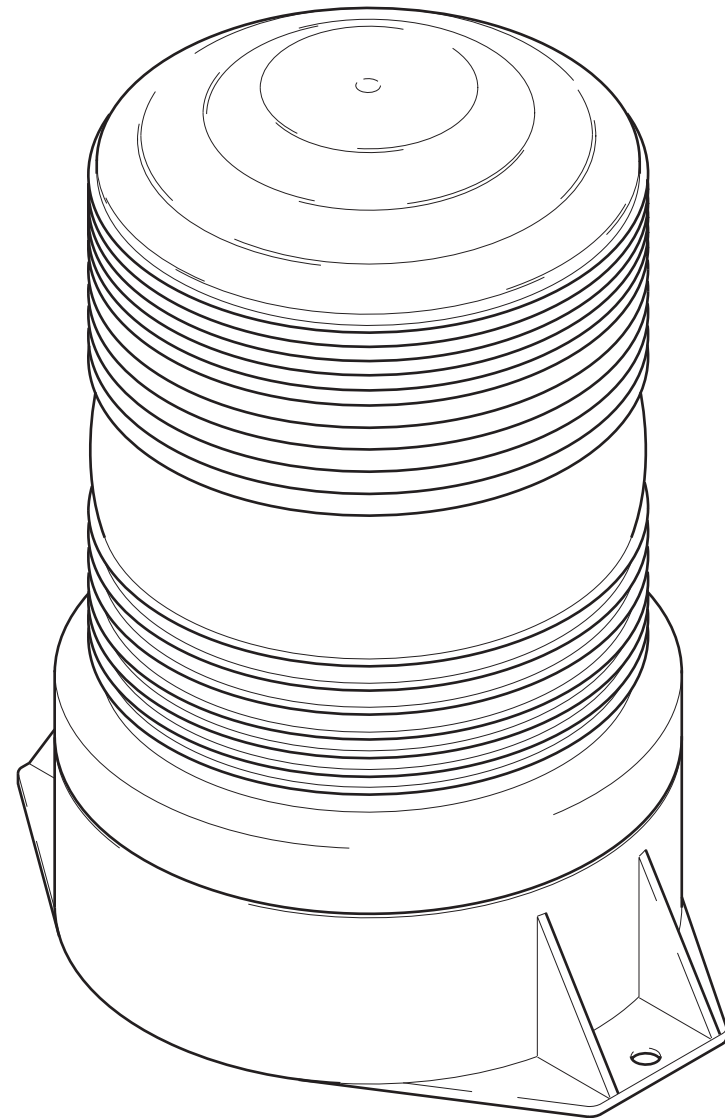

Wiring Instructions

Connect the "red flagged" wire to the DC power source (12-72 volts)

Connect the other wire to a secure Ground

Mounting Instructions

Use appropriate length hardware for the mounting application insuring that beacon will be securely fastened to surface

If a hole is drilled for the wires to pass through, insure the wires are protected from any sharp edges and do not interfere with existing wires