

3000/4000 SERIES STROBE BEACON REPLACEMENT STROBE TUBE FLAT - PIPE - MAGNETIC MOUNT

⚠ WARNING! High Voltage

Wait 10 minutes after shutting off
before starting any work on this unit.

STROBE TUBE REPLACEMENT


1. Remove the Beacon lens and dress ring.

NOTE


DO NOT TOUCH the glass part of the
tube assembly.

2. Loosen the 3 terminals securing strobe tube to CN1.
3. Remove defective strobe tube and replace with new tube.
4. Securely tighten the 3 terminals on CN1.
5. Reassemble the beacon.


Loosen, but **DO NOT REMOVE**,
all 3 screws

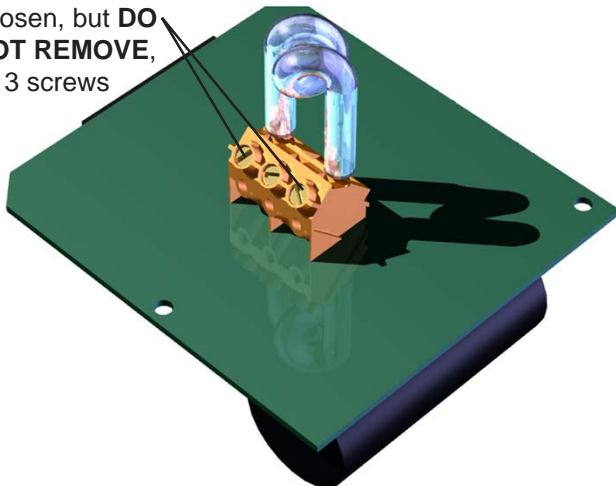

Insert all 3 wires of
new tube into holes
in terminal block
until they bottom
out. **DO NOT
FORCE TUBE
FURTHER.**

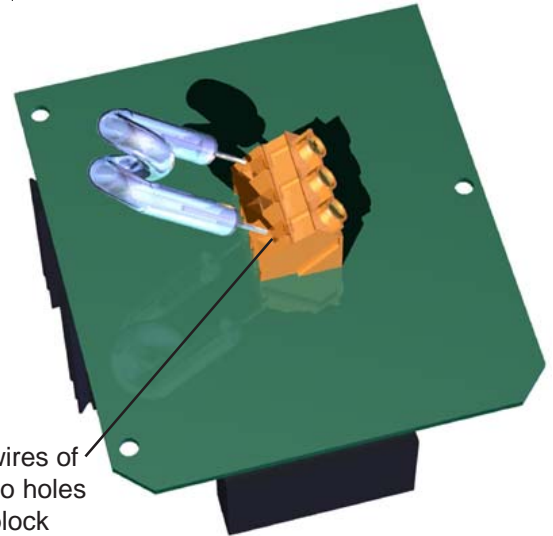

Tighten brass screws and
gently bend tube to vertical
position as shown.

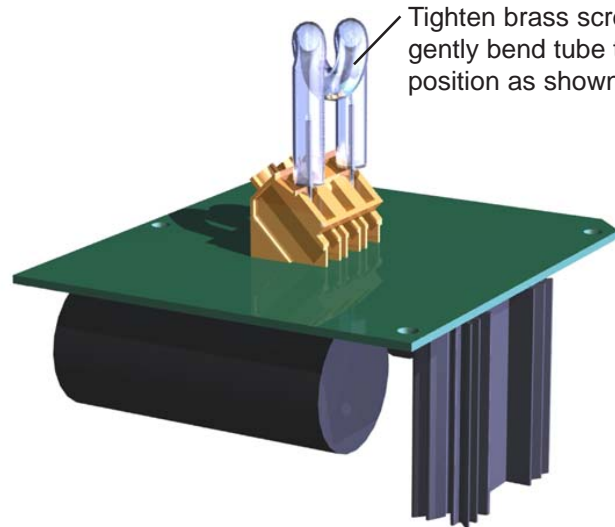

WARRANTY

SoundOff Signal warrants this tube for one (1) full year from the date of purchase to the original purchaser against any manufactured defects or workmanship. This warranty applies only to units installed according to manufacturer's installation instructions and operated within the units specifications.

Warranty is void if the unit was installed incorrectly or maliciously damaged.

SoundOff Signal's obligation under this warranty is limited to replacing, adjusting or repairing this system or its damaged parts. All warranty claims must be accompanied by a dated proof of purchase.

SoundOff Signal retains the right to be the sole mediator of what constitutes defects in performance or manufacturing.