



**New UltraLITE 2 Module Exterior Bar & Windshield Light has a small size & versatile mounting.**

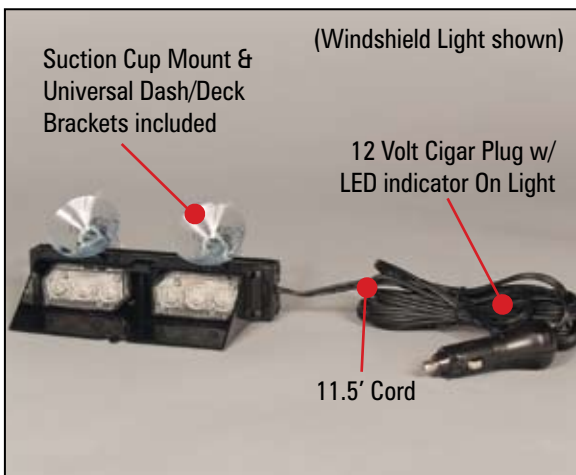

**2 Module Windshield light has two mounting options, 12 volt cigar plug & 11.5' of cord.**

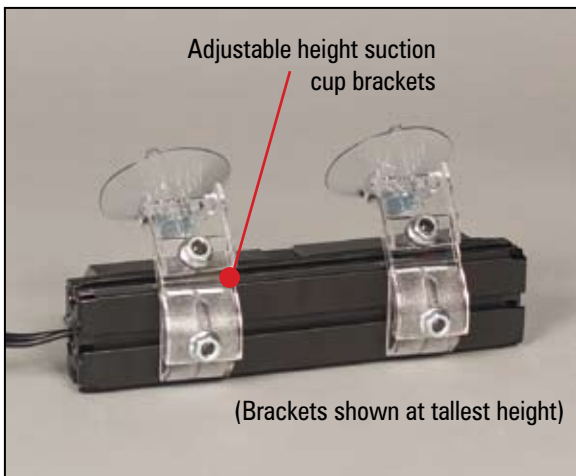

**Height of Suction Cup Brackets can be adjusted to position light closer or farther from the windshield.**

## UltraLITE 2 Head Lights

- #EL3H02A0+(x) Windshield Light
- #EL3D02A00(x) Exterior Bar
- #EL3D02A00(x)-24 Exterior Bar (10-30 volt)



**GOOD BETTER BEST**  
PRODUCT RATING

- New 2 Module UltraLITE Lights have a more versatile, smaller size to mount into tight areas. Exterior light may also be used for interior applications.
- 2 Head Windshield Light includes removable shroud with adjustable height suction cup brackets & a pair of Universal Dash/Deck Headliner Mount Brackets for versatile mounting. Light includes cigar plug with 11.5' wire for easy installation.
- Exterior Warning Bar ships with a pair of Universal Dash/Deck Headliner Mount Brackets & mounting hardware (optional vehicle specific brackets are available, please see pg. 14 in our 2009 Warning Products Catalog or our website).
- Created with our powerful LED3 Mini Light modules with Gen3 LEDs that feature advanced internal optics to enhance & brighten the LED light to heighten your warning signal and visibility on the roads.
- Offered in 15 solid or split colors.

### TECHNICAL SPECIFICATIONS

Overall Dimensions:	length x height x depth
Windshield Light	6.9" l x 1.54" h x 3.5625" d (w/ shroud)
Interior Light	6.9" l x 1.54" h x 1.7" d
Current Draw:	< 1 amp
Voltage:	10 - 16 Vdc 10 - 30 Vdc (Exterior only)
# of LEDs:	6 Gen3 LEDs
Operating Temp.:	-40° to +65° C
Flash Patterns:	33

**SoundOff Signal**  
an employee owned company



1.800.338.7337 / www.soundoffsignal.com

**UltraLITE 2 Module Exterior & Windshield Lights**

**NEW Product Release**